
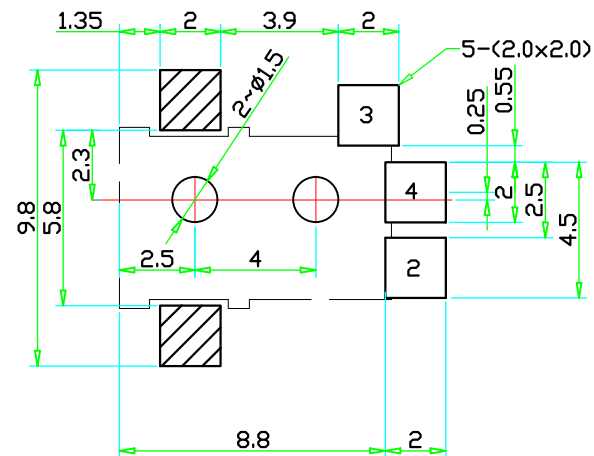
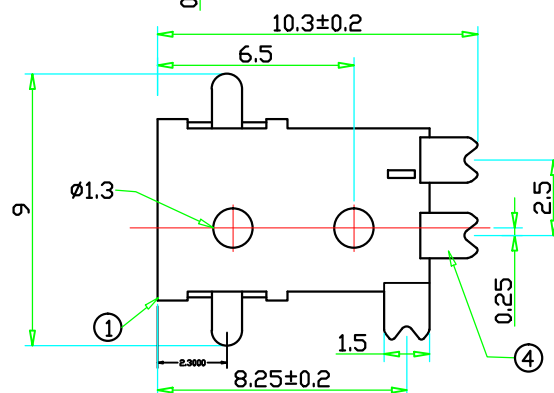


SCHMATIC

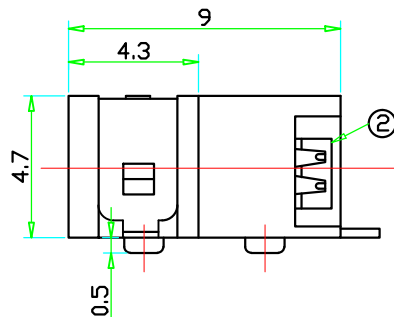

P.C.B LAND

PIN	Ø1.0	Ø1.3
APPD.		

No	DESCRIPTION	QTY	MATERIAL	PLATING	Specifications	DC-041B-SMD
1	HOUSING	1	PPA		Ratings:DC 12V0.5A	TITLE: DC JACK
2	SPRING	1	Be-Cu	Ag-Plating	Contact Resistance: 30m ohm max	UNLESS OTHERWISE SPECIFIED TOLERANCE ±0.1 ANGLE TOL ±30" UNIT: mm SCALE: NA DRAWN: CHENG DATE: 2004-04-08 CHECKED: DATE: APPROVED: DATE:
3	CURVE PIECE	1	BRASS	Ag-Plating	Insulation Resistance: 100M ohm at 500V	
4	CONTACT FOOT	1	BRASS	Ag-Plating	Dielectnic Strength: AC 500V for 1 Minute	
5	PIN	1	BRASS	Ag-Plating	Insertion & Extraction Force: 0.3-1.0Kg	
					Life: 5.000 Cycles	
XYFW (www.cnxyfw.com)						