


1	2	3	4	5	6	7	8
Max	Modification	Date	Draw	Approve			

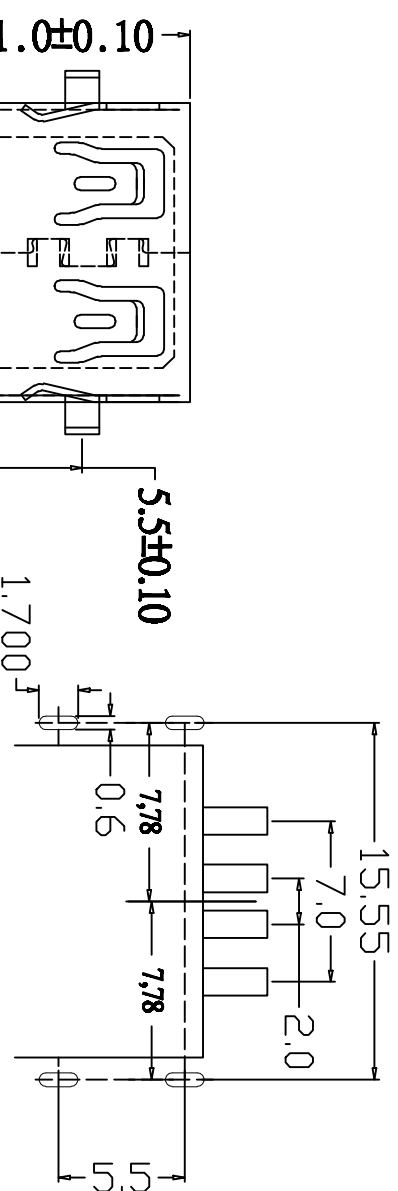

规格书: Specifications:  
电气特性: Electrical:

- 1. 额定电流: Current Rating  
1.5A/contact terminal
- 2. 额定电压: Voltage Rating  
30V DC
- 3. 接触电阻: Contact Resistance  
30 milliohms MAX
- 4. 耐电压: Dielectric Withstanding Voltage:  
500 V AC AT Sea Level
- 5. 绝缘电阻: Insulation Resistance:  
1000MEGA ohms MIN

物理性能: Mechanical:

- 1. 插拔力: Connector Mate and Unmate Force  
Mate force: 3.57kgf(MAX)  
Unmate force: 1.02kgf(MIN)
- 2. 端子保持力: Terminal Retention  
1.0kgf(MIN)

原材料: Material:

- 1. 塑壳: Housing:  
Hing Temperature Thermoplastics,
- 2. 端子: Contact: Copper Alloy C2680
- 3. 外壳: Shell: Copper Alloy C2680/SPCC

电镀: Finish:

- 1. 端子: Contact: Plated Gold in Mating Area;  
Tin On Solder Talls
- 2. 外壳: Shell:  
铜壳四周镀80U”(MIN)镀  
镍壳四周镀80U”(MIN)镀  
Nickel Plating

Shenzhen City Xiangyunfeiwu Technology Co., Ltd.

MANUFACTURE DWG	成品图	DATE	DATE	UNIT	MM	DRAWING	DRAWING	NO.	DWGNO.
TOLERANCE UNLESS OTHERWISE	公差一律按	DATE	DATE	UNIT	MM	DRAWING	DRAWING	NO.	DWGNO.
XX±0.15	X±5°	DATE	DATE	UNIT	MM	DRAWING	DRAWING	NO.	DWGNO.
XX±0.05	X±2°	CHECKED	CHECKED	SCALE	1:1	DESIGN	LUFU	NAME	短S母座
XXX±0.02	XX±1°	APPROVE	APPROVE	NEW				版本	短S母座
								VER	短S母座
								VER	短S母座
								SHEET	短S母座
								PG1	短S母座