
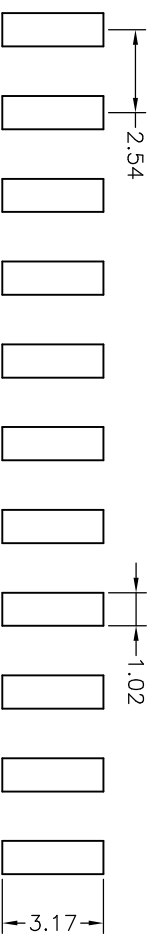
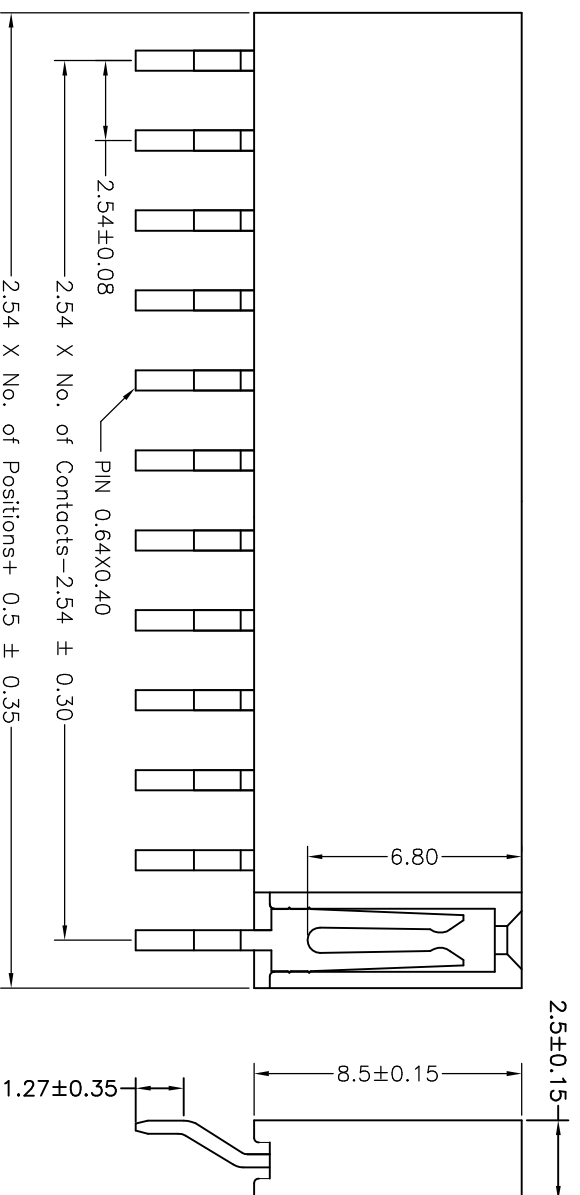


2.54mm Female Header, Single Row, Right Angle SMT



PCB LAYOUT

SPECIFICATIONS

- Current Rating : 3AMP
- Operation Temperature: -40° C to +105° C
- Contact Resistance : 20mΩ Max.
- Insulation Resistance: 1000MΩ Min.
- Withstanding Voltage : AC 1000V
- Insulator Material : Polyester (UL94V-0)
- Standard: PA6T
- Contact Material : Phosphor bronze
- Contact plating : Au or Sn over 50u" Ni

<p style="text-align: center; font-size: 2em; font-weight: bold;">XYFWCN</p>		品名规格	FH2.54*8.5 单排 90度 卧贴			
		客户品号				
		版本	制图	审核	核准	日期
公差	X: ±0.35 X.X: ±0.25 X.XX: ±0.20 X.XXX: ±0.15	UNIT: mm	A/0	易红	王笑	2008-6-28
Scale: 1:1						