

?	?	?	?	?	?	?	?	?	?
Mapx		Modification		Date	Draw	Approve			

规格说明: Specifications:

电气特性: Electrical:

- 1. 额定电流: Current Rating
1.5A/contact terminal
- 2. 额定电压: Voltage Rating
30V DC
- 3. 接触电阻: Contact Resistance
30 milliohms MAX
- 4. 耐电压: Dielectric Withstanding Voltage:
500 V AC AT Sea Level
- 5. 绝缘电阻: Insulation Resistance:
1000MEGA ohms MIN

物理性能: Mechanical:

- 1. 插拔力: Connector Mate and Unmate Force
Mate force: 3.57kgf(MAX)
Unmate force: 1.02kgf(MIN)
- 2. 端子保持力: Terminal Retention
1.0kgf(MIN)


原材料: Material:

- 1. 塑壳: Housing:
Hing Temperature Ternmaplastics,
- 2. 端子: Contact: Copper Alloy C2680
- 3. 外壳: Shell: Copper Alloy C2680/SPCC

电镀: Finish:

- 1. 端子: Contact: Plated Gold in Mating Area;
Tin On Solder Talls
- 2. 外壳: Shell: Nickel Plating
铜壳四周镀80U”(MIN)镀

端子四周镀50U”(MIN)镀,镀金区域镀100—200U”镀金1U”

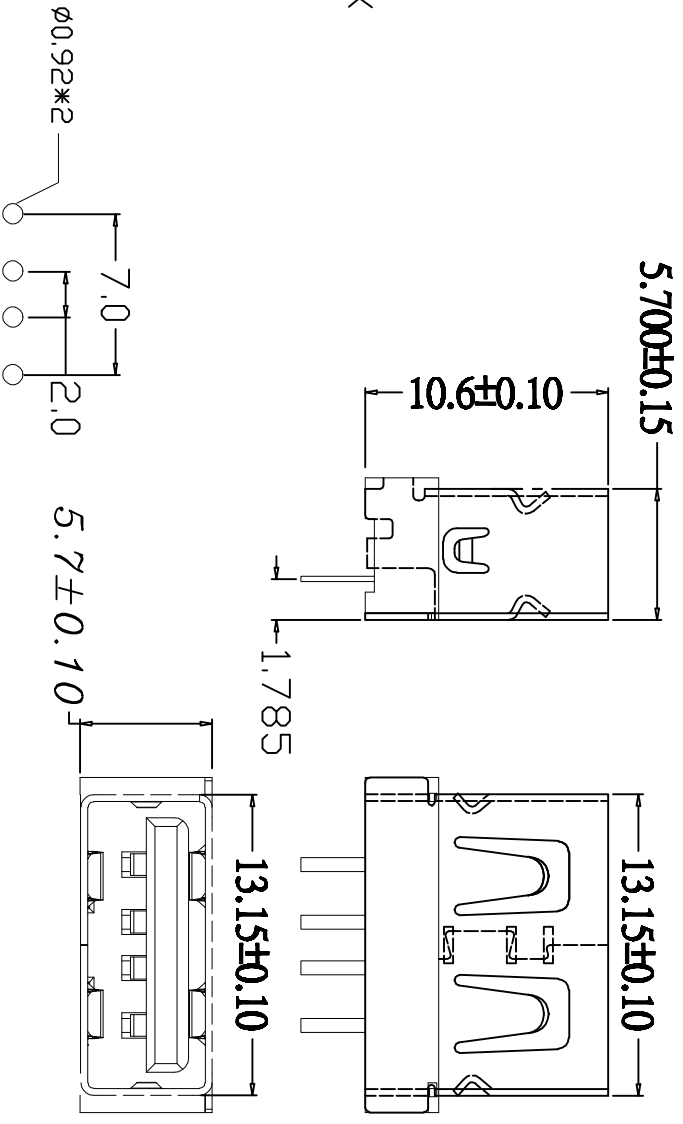

由 Autodesk 教育版产品制作

F

E

B

A

1 2 3 4 5 6 7 8

F

E

B

A

由 Autodesk 教育版产品制作

MANUFACTURE DWG		成品图	
公差一星表		公差一星表	
TOLERANCE UNLESS OTHERWISE			
.X±0.15	X±5°	DATE	DATE
XX±0.05	.X±2°	CHECKED	CHECKED
		APPROVE	APPROVE
		UNIT	MM
		DRAWING	DESIGN
		DRAWING NO.	DESIGN NAME
		VER	VER
		DWGNO.	DWGNO.
		10.6	10.6
		母座	母座
		SHEET	SHEET
		PG1	PG1