
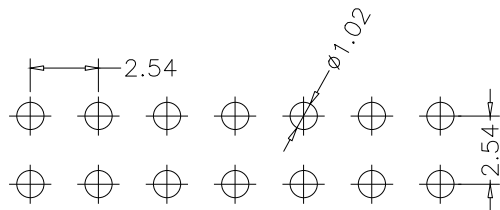
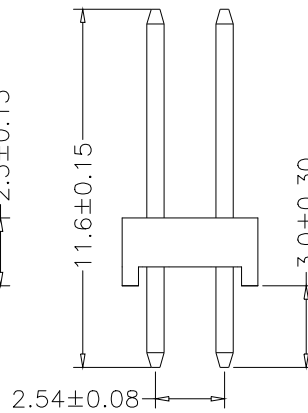
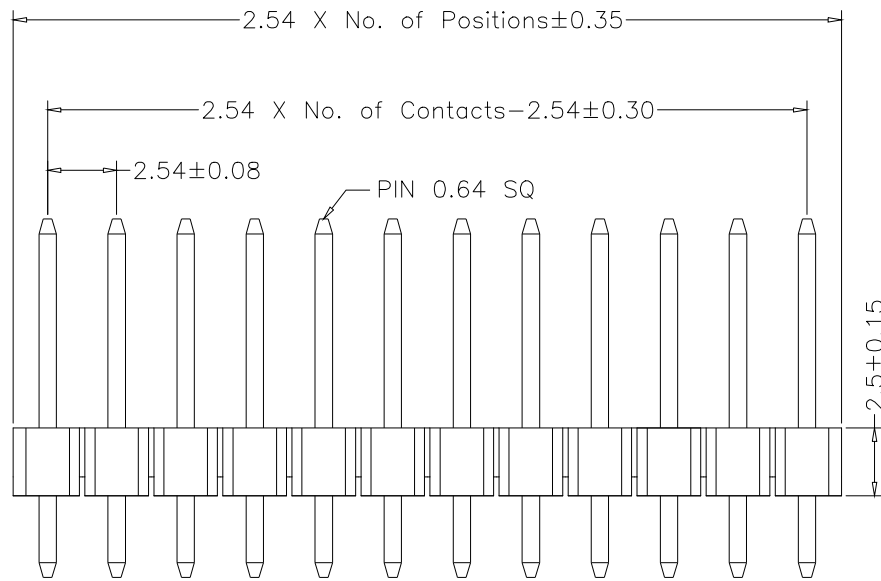


2.54mm Pin Header, Dual Row Straight

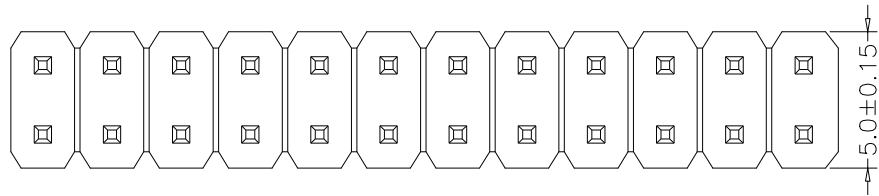

PCB LAYOUT

SPECIFICATIONS

Current Rating : 3AMP
 Operation Temperature: -40° C to +105° C
 Contact Resistance : 20mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage : AC 1000V
 Insulator Material : Polyester (UL94V-0)
 Standard: PBT
 Contact Material : Brass
 Contact plating : Au or Sn over 50u" Ni

<h1>XYFWCN</h1>						
未注公差	X: ±0.35	品名规格	PH2.54 双排 L=11.6/3.0 180度			
	X.X: ±0.25		客户品号			
	X.XX: ±0.20					
	X.XXX: ±0.15					
Size: A4	UNIT: mm	版本	制图	审核	核准	日期
Scale: 1:1		A/0	易红	王笑		2008-9-9