
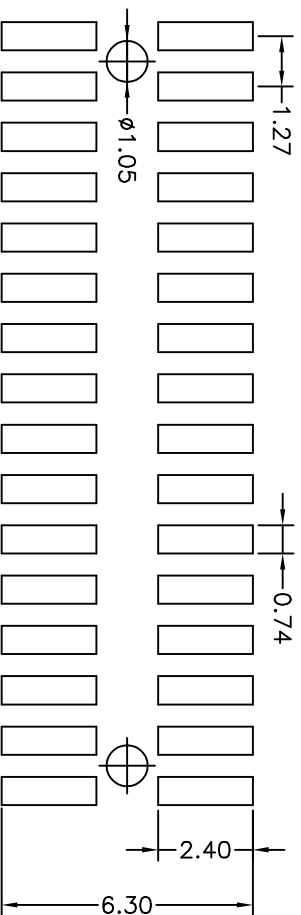

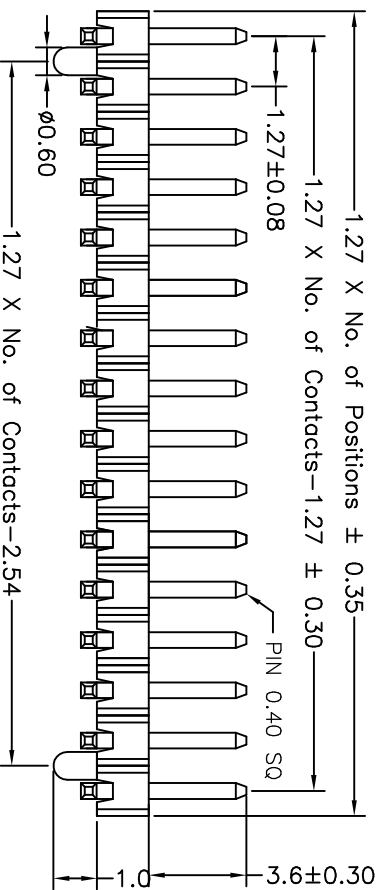


# 1.27mm Pin Header, Dual Row, S.M.T

## SPECIFICATIONS

Current Rating : 1AMP  
 Operation Temperature: -40°C to +105°C  
 Contact Resistance : 20mΩ Max.  
 Insulation Resistance: 1000MΩ Min.  
 Withstanding Voltage : AC 500V  
 Insulator Material : Polyester(UL94V-0)  
 Standard: Nylon-6T  
 Contact Material : Brass  
 Contact plating : Au or Sn Over 50u"  
 Ni

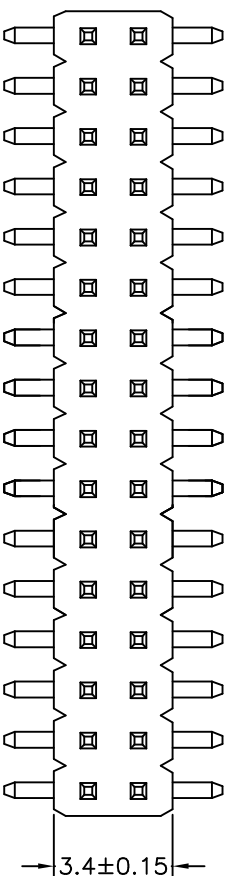

PCB LAYOUT

# XYFWGN

客户

X: ±0.35	品名规格	PH1.27*1.5 双排 带柱			
X.X: ±0.25	客户品号	L=7.0/5.4(0)/3.6 SMT			
X.XX: ±0.20	版本	制图	审核	核准	日期
X.XXX: ±0.15	UNIT: mm	林良	Wang		
Size: A4 Scale: 1:1	A/0				08-5-19