

Map	Modification	Date	Draw	Approve
-----	--------------	------	------	---------

规格说明: Specifications:

- 1. 额定电流: Current Rating
1.5A/contact terminal
- 2. 额定电压: Voltage Rating
30V DC
- 3. 接触阻抗: Contact Resistance
30 milliohms MAX
- 4. 耐电压: Dielectric Withstanding Voltage:
500 V AC AT Sea Level
- 5. 绝缘阻抗: Insulation Resistance:
1000MEGA ohms MIN

物理性能: Mechanical:


- 1. 插拔力: Connector Mate and Unmate Force
Mate force: 3.57kgf(MAX)
Unmate force: 1.02kgf(MIN)
- 2. 端子保持力: Terminal Retention
1.0kgf(MIN)

- 1. 塑壳: Housing:
Hing Temperature Thermoplastics,
- 2. 端子: Contact: Copper Alloy C2680
- 3. 外壳: Shell: Copper Alloy C2680/SPCC

1. 端子: Contact: Plated Gold in Mating Area,
Tin On Solder Talls
端子四周镀50U”(MIN)镍,镀金区域镀100-200U”镀金1U”

铜壳四周镀80U”(MIN)镍

Nickel Plating

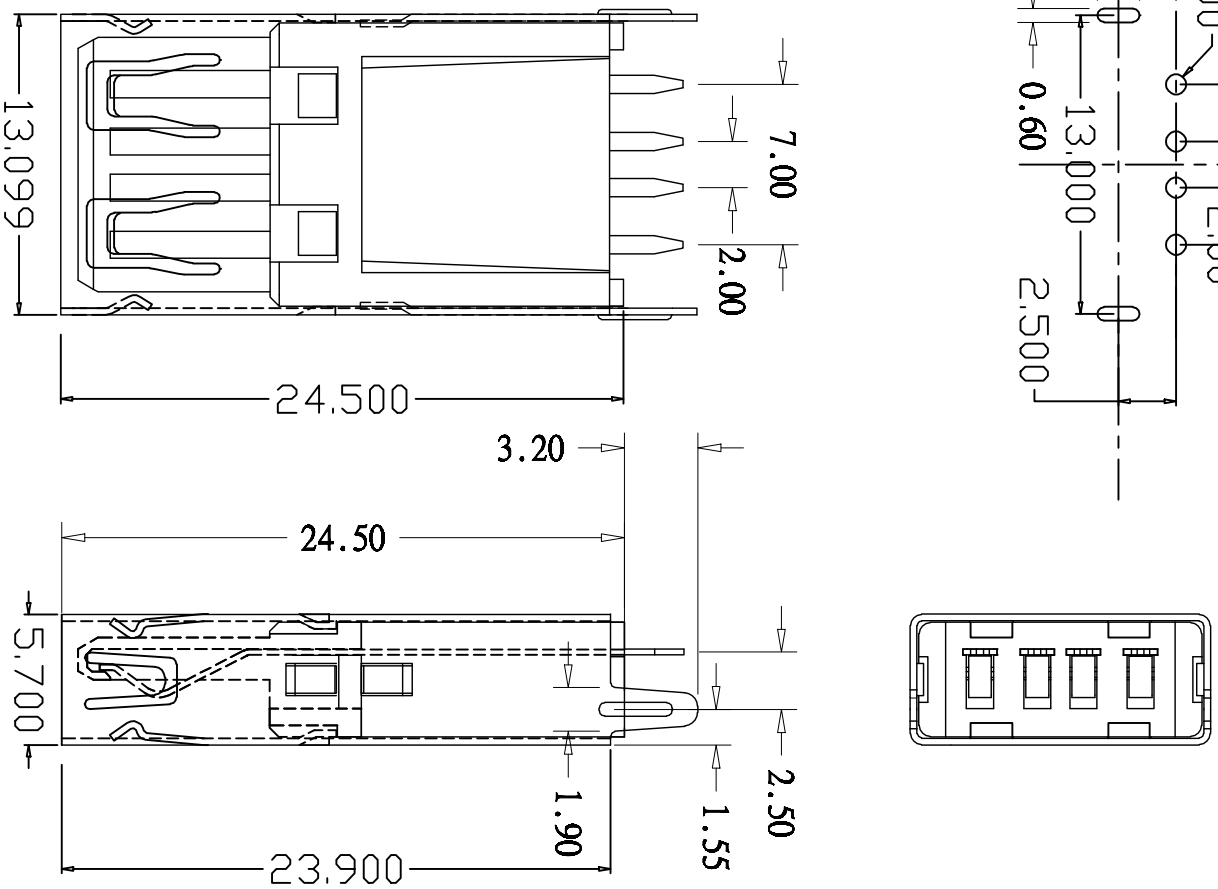

公差	公差	日期	单位	比例	角法	图名	DWG NO	审核	页
TOLERANCE	UNLESS OTHERWISE	DATE	UNIT	SCALE	VIEW	DESIGN	NAME	APPROVE	SHEET
X±0.15	X±5"		MM	1 : 1					
XX±0.05	.X±2"	审核							
XXX±0.02	.XX±1"	核准							