


J-connector


1.27mm Female Header, Single Row, S.M.T

SPECIFICATIONS




Current Rating : 1AMP
 Operation Temperature: -40°C to +105°C
 Contact Resistance : 20m Ω Max.
 Insulation Resistance: 1000M Ω Min.
 Withstanding Voltage : AC 500V
 Insulator Material : Polyester(UL94V-0)
 Standard: Nylon-6T
 Contact Material : Phosphor Bronze
 Contact plating : Au or Sn Over 50u"
 Ni

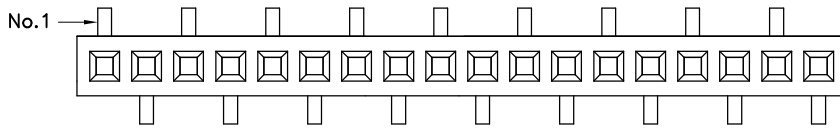


TYPE 1

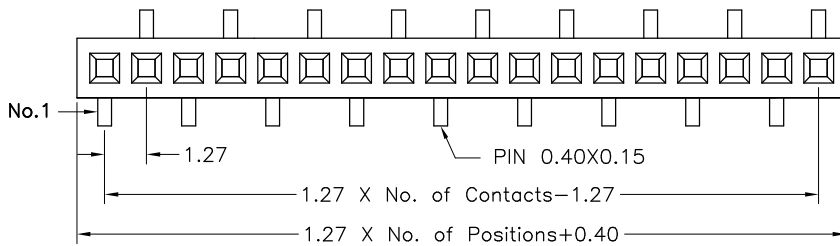

TYPE 2

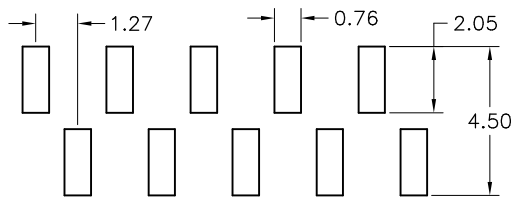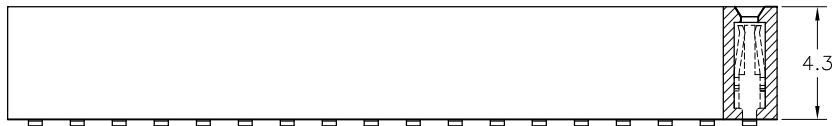

TYPE 1

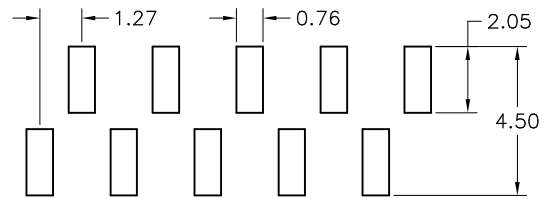

TYPE 2

PCB LAYOUT

XYFWCN

未注公差: X: ±0.5
 X.X: ±0.35
 X.XX: ±0.20
 X.XXX: ±0.1

品名规格
 客户品号

FH1.27*4.3 单排 SMT

Size: A4 UNIT: mm

版本

制图

审核

核准

日期

Scale: 1:1



A/0

易红

王笑

08-9-1