



# 2.54mm Ejector Header, Right Angle

## SPECIFICATIONS




Current Rating : 3AMP  
 Operation Temperature: -40°C to +105°C  
 Contact Resistance : 20mΩ Max.  
 Insulation Resistance: 1000MΩ Min.  
 Withstanding Voltage : AC 1000V  
 Insulator Material : Polyester(UL94V-0)  
 Standard: PBT or PA6T  
 Contact Material : Brass  
 Contact plating : Au or Sn over 50u" Ni




长耳扣(常用规格)



短耳扣(不常用规格)

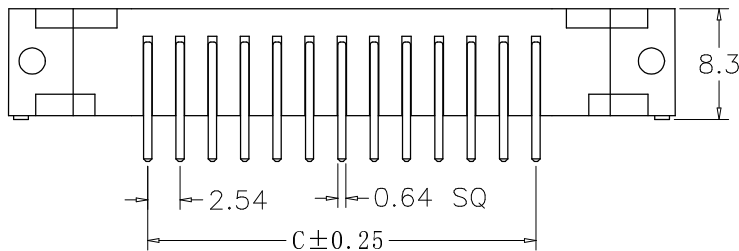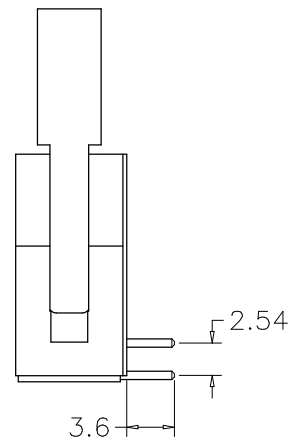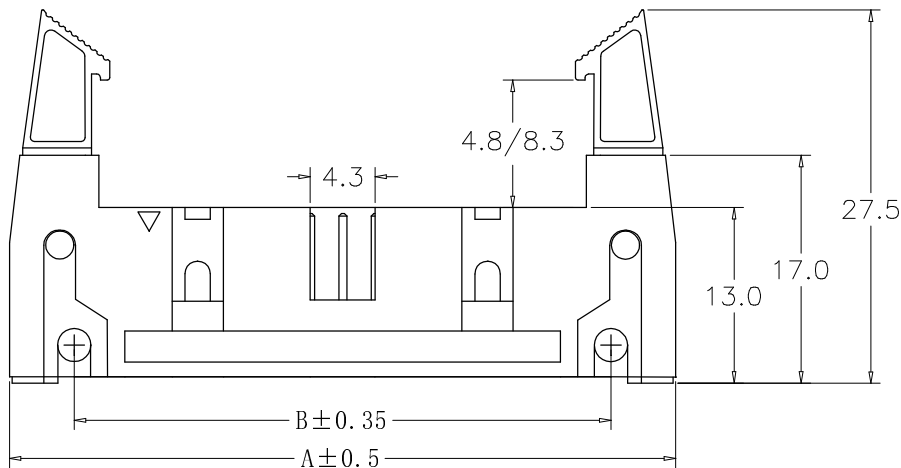

No. of Contacts	A	B	C
10	32.00	21.84	10.16
14	37.08	26.92	15.24
16	39.62	29.46	17.78
20	44.70	34.54	22.86
26	52.32	42.16	30.48
30	57.40	47.24	35.56
34	62.48	52.32	40.64
40	70.10	59.94	48.26
50	82.80	72.64	60.96
60	95.50	85.34	73.66
64	100.58	90.42	78.74

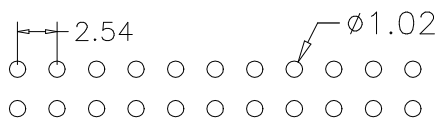

PCB LAYOUT

XYFWCN

未注公差  
 X: ±0.5  
 X.X: ±0.35  
 X.XX: ±0.20  
 X.XXX: ±0.1

品名规格

2.54 牛角 xxP 90度

客户品号

Size:A4

UNIT:mm

版本


制图

审核

核准

日期

Scale:1:1



A/0

易红

王笑

08-9-1