


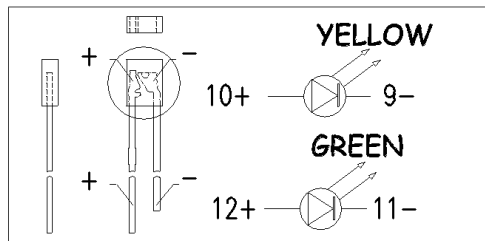


RECOMMENDED PCB LAYOUT (TOP VIEW)  
(ALL TOLERANCES ARE ±0.05)



**SPECIFICATIONS:**

1. Voltage: 150V AC RMS
2. Current Rating: 1.5A
3. Contact Resistance: 30mΩ MAX.
4. Insulation Resistance: 500MΩ MIN.
5. Dielectric Withstang Voltage :1000V AC
6. Operature Temperature: -40°C~80°C
7. Durability: 500 Mating Cycles MIN.

**XYFW**

UNIT :mm

Approved By: JP.Gong

.0±0.25    .00±0.20    .000±0.10  
沉板 DIP 带灯带弹

Part No:RJ88-BX11-RVSL1

REV.  
D

Drafted by:JG.CHEN

[www.cnxyfw.com](http://www.cnxyfw.com)

SHEET 1 OF 1