



P.C.B LAYOUT

| PIN | Dimension mm | |
|-----|--------------|------|
| | A | B |
| 2 | 1.0 | 4.0 |
| 3 | 2.0 | 5.0 |
| 4 | 3.0 | 6.0 |
| 5 | 4.0 | 7.0 |
| 6 | 5.0 | 8.0 |
| 7 | 6.0 | 9.0 |
| 8 | 7.0 | 10.0 |
| 9 | 8.0 | 11.0 |
| 10 | 9.0 | 12.0 |
| 11 | 10.0 | 13.0 |
| 12 | 11.0 | 14.0 |
| 13 | 12.0 | 15.0 |
| 14 | 13.0 | 16.0 |
| 15 | 14.0 | 17.0 |
| 16 | 15.0 | 18.0 |
| 17 | 16.0 | 19.0 |
| 18 | 17.0 | 20.0 |
| 19 | 18.0 | 21.0 |
| 20 | 19.0 | 22.0 |

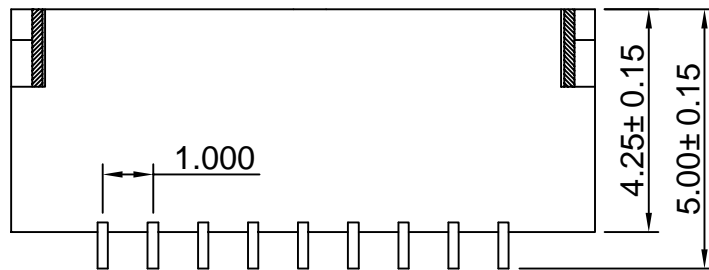

MATERIAL:PIN: BRASS/TIN-PLATED
 WAFER :NYLON6T, UL94V-0
 Solders Tabs:BRASS
 MATES WITH ZYA1001H SERIES SINGLE ROW HOUSING

SPECIFICATIONS

Current rating: 1A AC, DC
 Voltage rating: 50V AC,DC
 Temperature range: -25° C ~ +85° C
 Insulation resistance: 500M Ω/ min.
 Withstanding voltage: 500V AC/ minute.
 Contact resistance: 20m Ω/ max.

| | | | | | | |
|----------------------|--------------|------|---------------------|----|----|-----------|
| XYFW(www.cnxyfw.com) | | | | | | |
| 未注公差 | X: ±0.35 | 品名规格 | JST1.0 SMT90度 Wafer | | | |
| | X.X: ±0.25 | | 客户品号 | | | |
| | X.XX: ±0.20 | | | | | |
| | X.XXX: ±0.15 | | | | | |
| Size: A4 | UNIT: mm | 版本 | 制图 | 审核 | 核准 | 日期 |
| Scale: 1:1 | φ 7 | A/0 | 易红 | 王笑 | | 2008-6-28 |