




2.00mm Female Header, Dual Row, Straight

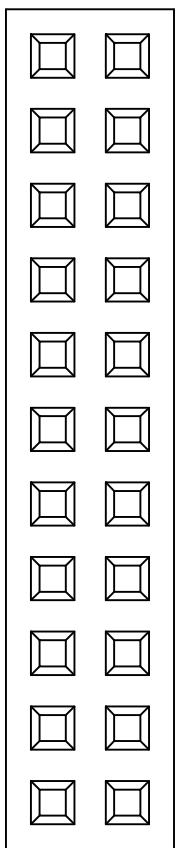

4.0 ± 0.15

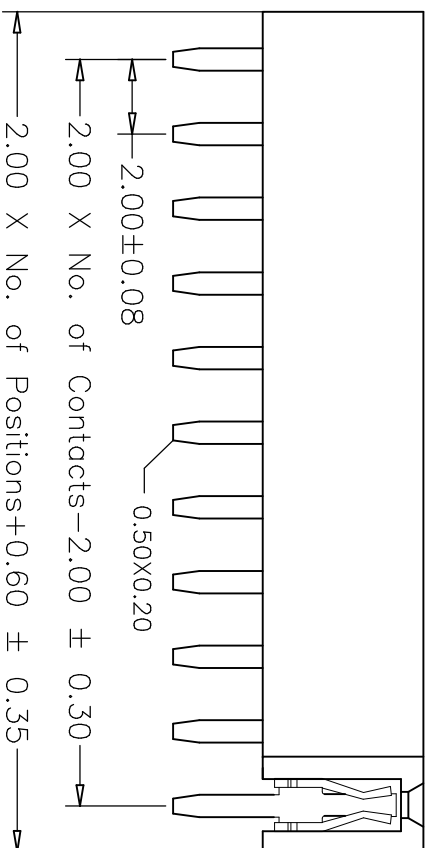

4.3 ± 0.15




2.0 ± 0.15

SPECIFICATIONS

- Current Rating : 1.5AMP
- Operation Temperature: -40° C to +105° C
- Contact Resistance : 20mΩ Max.
- Insulation Resistance: 1000MΩ Min.
- Withstanding Voltage : AC 500V
- Insulator Material : Polyester (UL94V-0)
- Standard: NYlon-6T
- Contact Material : Phosphor Bronze
- Contact plating : Au over 50 u" Ni

PCB LAYOUT

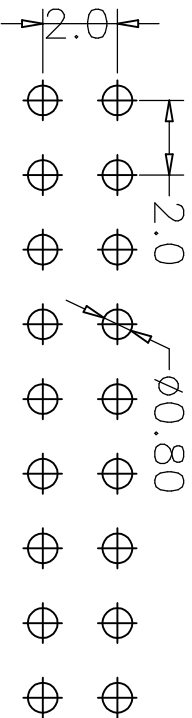

XYFWCN

未注公差		X: ±0.35	品名规格		FH2.0*4.3 双排 W=4.0 180度 PC2.8		
注 公 差		X.X: ±0.25	客户品号				
		X.XX: ±0.20	版本		A/0		
		X.XXX: ±0.15	制图		易红		
Size: A4		UNIT: mm	审核		王笑		
Scale: 1:1			核准				
			日期		2008-6-28		