

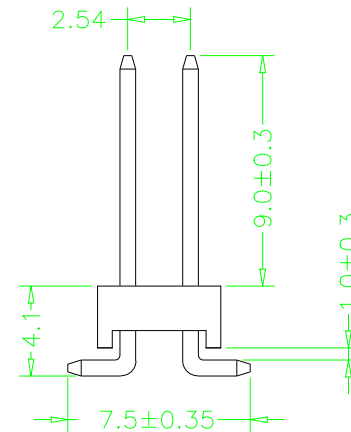
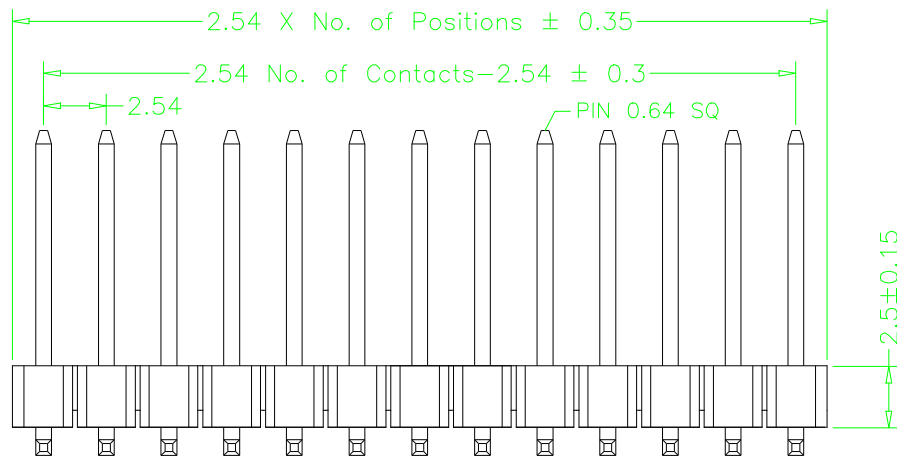


2.54mm Pin Header, Dual Row, S.M.T

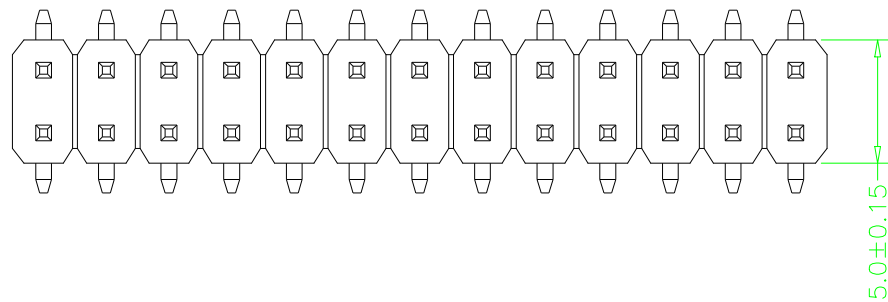

SPECIFICATIONS

- Current Rating : 3AMP
- Operation Temperature: -40°C to +105°C
- Contact Resistance : 20mΩ Max.
- Insulation Resistance: 1000MΩ Min.
- Withstanding Voltage : AC 1000V
- Insulator Material : Polyester(UL94V-0)
Standard: Nylon-6T
- Contact Material : Brass
- Contact plating : Au or Sn over 50u" Ni

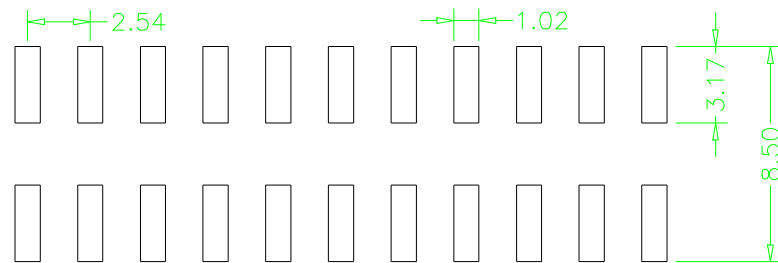

PCB LAYOUT

XYFWCN

未注公差	X: ±0.35	品名规格	PH2.54 双排 L=14.7/7.5(1.0)/9.0 SMT			
	X.X: ±0.25		客户品号			
	X.XX: ±0.20					
	X.XXX: ±0.15					
Size:A4	UNIT:mm	版本	制图	审核	核准	日期
Scale:1:1	☉ ㄇ	A/0	易红	王笑		2008-6-28