
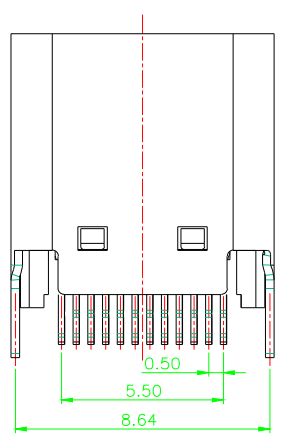
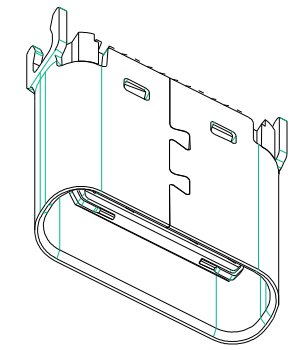

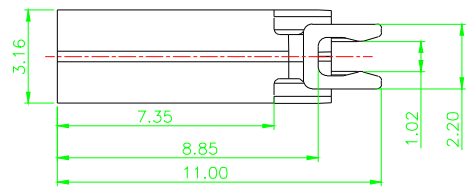
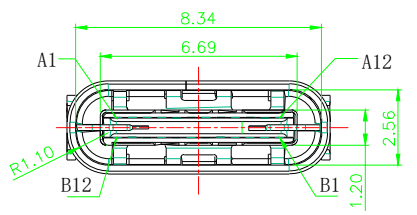
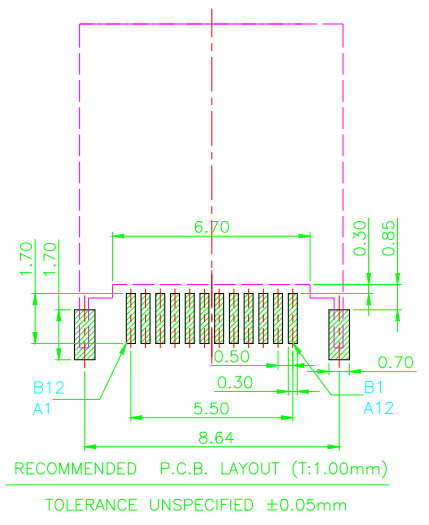


REV	LTR	DESCRIPTION	DATE	REVISER	APPD
A1		--	2015/07/21	ZHAOZHEN	ZZ

- NOTES:
SPECIFICATION:
1. CURRENT RATING: 3.0A MAX
 2. VOLTAGE: 100 VAC
 3. TEMPERATURE RANGE: -30 °C ~ 85 °C
 4. CONTACT RESISTANCE: 40 MILLIONHM MAX
 5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
 6. INSERTION FORCE : 5N~20N
 7. UNMATING FORCE: 8N~20N
 8. DURABILITY: 10,000 CYCLES

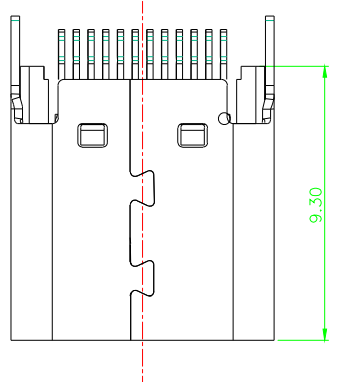

A1	GND	B12	GND
A2	SSTXP1	B11	SSRXP1
A3	SSTXN1	B10	SSRXN1
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10	SSRXN2	B3	SSTXN2
A11	SSRXP2	B2	SSTXP2
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

TABLE:

PART NUMBER	NO.	DESCRIPTION	MATERIAL	REMARKS	QTY	PACKAGING
Z-CF012SLB01T-C-01	5	SHELL	STAINLESS STEEL	NI Plated	1PCS	TRAY
	4	SPRING	STAINLESS STEEL	---	2PCS	
	3	SHIELDING PLATE	STAINLESS STEEL	NI Plated	1PCS	
	2	CONTACT	COPPER ALLOY	COPPER ALLOY T=0.12MM, G/F PLATING ON CONTACT AREA; TIN PLATING ON SOLDER TAIL/IN UNDERPLATING OVERALL	1SET	1PCS
	1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK		
				REMARKS		

DWG NO	CCHK401	UNIT: MM	ITEM NO	PART NO
REV	A1	SCALE: 1:1		
DATE	2015/07/21	 TOLERANCE UNSPECIFIED X.X ±0.30 X.XX ±0.20 X.XXX ±0.10 X° ±5° X.X° ±2°	XYFWCN USB C F TYPE夹板式1.0 CONN. H=9.3 半金锡G/F	
DESIGN	ZHAOZHEN		XYFW-CF012SLB01T-C-01	
CHECKED	ZHAOZHEN			
APPROVED	ZHAOZHEN			